

Dam: Daguangba

Country: China

River: Changhua

19°1'11.44"N 108°58'47.95"E

19.019844 108.979988

Owner/Client: Hainan Provincial Electric Power Company (HEPCO)

Designer/Engineer: Mid-South Design and Research Institute (MSDI), MOE & MWR

Contractor: Gezhouba Construction Bureau

Purpose (code): H I W

Site start: 01.06.1990

RCC start: 01.12.1991

RCC completion: 30.12.1993

Site completion: 01.07.1995

Height (m): 57

Length (m): 719

Volume of RCC ($m^3 \times 10^3$): 485

Total volume ($m^3 \times 10^3$): 860

Reservoir capacity ($m^3 \times 10^6$): 1710

Upstream slope: V

Forming of upstream face (code): (1)

Downstream slope: 0.75

Forming of downstream face (code): (10)
(3)

Spillway slope: 0.75

Forming of spillway face (code): (1)

Depth of layers (mm): 300

Depth of lifts (mm): 300

Cement content (kg/m^3): 55

Pozzolan content (kg/m^3): 96

Code for pozzolan: (F)


RCCDAM Unique Serial No.: RCCDAM0130

Completed Dam



RCCDAM0130CD

Google Earth

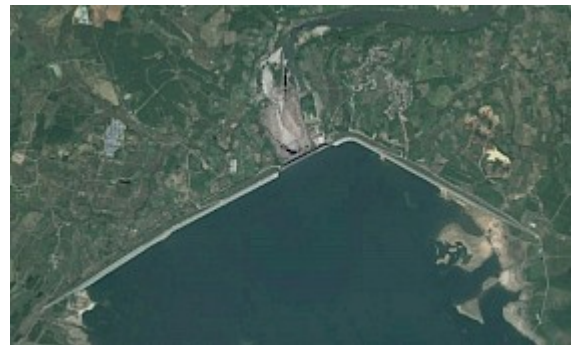

RCCDAM0130GE

Guide to Abbreviations

Purpose

- E Environmental
- F Flood control
- G Groundwater recharge
- H Flood control
- I Irrigation
- N Navigation
- P Pollution control
- R Recreation
- W Water supply

Facing method

- (1) Traditional concrete against formwork
- (2) Traditional concrete against formwork with external geomembrane
- (3) RCC against formwork
- (4) RCC against formwork with external geomembrane
- (5) Traditional concrete against precast concrete panels
- (6) Traditional concrete against precast concrete panels with geomembrane
- (7) RCC against precast concrete panels
- (8) RCC against precast concrete panels with geomembrane
- (9) RCC against precast concrete panels with hot poured membrane
- (10) RCC against precast concrete blocks
- (11) Reinforced conventional concrete cast before RCC placement
- (12) Reinforced conventional concrete cast after RCC placement
- (13) Reinforced concrete cast against precast units or slip-formed facing elements
- (14) Slip-formed/extruded facing elements
- (15) RCC supported by fill shoulders
- (16) Mechanically compacted unformed face of RCC
- (17) Unformed face of RCC
 - ' GEVR/GE-RCC
 - * Stepped face

Pozzolans

- (-) No Pozzolan Used
- (C) High-lime flyash (ASTM Class C)
- (F) Low-lime flyash (ASTM Class F)
- (M) Milled sand
- (N) Natural pozzolan (ASTM Class N)
- (R) ROLAC (mixture of flyash and slag with or without limestone fines)
- (S) Ground-granulated blast-furnace slag
- (L) Mixture of GGBFS and limestone fines